



## Product description:

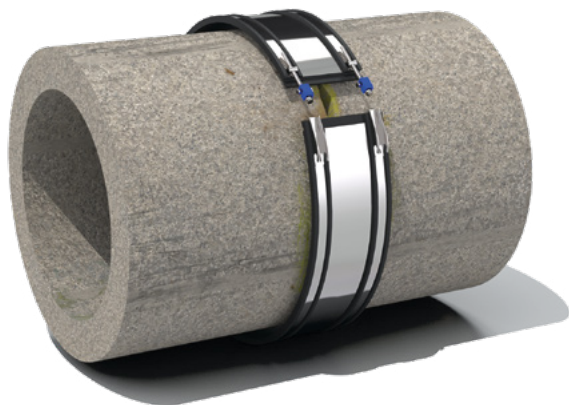

|                           |                                                                               |
|---------------------------|-------------------------------------------------------------------------------|
| Product Name              | Wraparound Coupling<br>MAGWRC                                                 |
| Product Group             | Couplings                                                                     |
| Product Code              | MAGWRC                                                                        |
| Sizes                     | over 300 mm                                                                   |
| Rubber                    | EPDM                                                                          |
| Steel Quality             | 1.4301 / AISI 304 / V2A                                                       |
| Pressure Rating           | o. G.                                                                         |
| Vacuum                    | o. G.                                                                         |
| Shear load resistance     | 25 Nm per mm DN                                                               |
| Standards                 | EN 681-1                                                                      |
| Shore Resistance          | 60                                                                            |
| Deflection                | 300 – 450 mm: 6°<br>451 – 600 mm: 5°<br>601 – 800 mm: 4°<br>801 – 1200 mm: 3° |
| Temperature Range         | -40 to 120 °C                                                                 |
| UV Resistance             | ✓                                                                             |
| Oil / petrol Resistance   | ✗                                                                             |
| Fire Performance          | Class F                                                                       |
| Soil Suitability          | ✓                                                                             |
| Flush-mounted Suitability | ✓                                                                             |
| Tensile Strength          | ✗                                                                             |

**Note:** All information is based on the current state of our technical experience at the time of preparation. If necessary, they must be adapted to any changes. We reserve the right to make technical changes. Our general terms and conditions of sale and delivery apply.

## Type 2B Split 370 mm wide repair couplings (These couplings allow assembly with pre-installed pipes!)

| Product Code | Pipe<br>(OD-Price Range) | Width – B<br>(mm) | Pressure<br>(bar) | Torque<br>(Nm) |
|--------------|--------------------------|-------------------|-------------------|----------------|
| MAGWRC3xx    | 300 – 385                | 370               | o. G.             | 20             |
| MAGWRC4xx    | 386 – 485                | 370               | o. G.             | 20             |
| MAGWRC5xx    | 486 – 585                | 370               | o. G.             | 20             |
| MAGWRC6xx    | 586 – 685                | 370               | o. G.             | 20             |
| MAGWRC7xx    | 686 – 785                | 370               | o. G.             | 20             |
| MAGWRC8xx    | 786 – 885                | 370               | o. G.             | 20             |
| MAGWRC9xx    | 886 – 985                | 370               | o. G.             | 20             |
| MAGWRC10xx   | 986 – 1085               | 370               | o. G.             | 25             |
| MAGWRC11xx   | 1086 – 1185              | 370               | o. G.             | 25             |
| MAGWRC12xx   | 1186 – 1285              | 370               | o. G.             | 25             |
| MAGWRC13xx   | 1286 – 1385              | 370               | o. G.             | 25             |
| MAGWRC14xx   | 1386 – 1485              | 370               | o. G.             | 25             |
| MAGWRC15xx   | 1486 – 1585              | 370               | o. G.             | 25             |
| MAGWRC16xx   | 1586 – 1685              | 370               | o. G.             | 25             |
| MAGWRC17xx   | 1686 – 1785              | 370               | o. G.             | 25             |
| MAGWRC18xx   | 1786 – 1885              | 370               | o. G.             | 25             |
| MAGWRC19xx   | 1886 – 1985              | 370               | o. G.             | 25             |
| MAGWRC20xx   | 1986 – 2085              | 370               | o. G.             | 25             |
| MAGWRC21xx   | over 2086                | 370               | o. G.             | 25             |

The clamping range of each MAGWRC coupling is 20 mm!

**CAUTION:** The specification of the outer diameter of the pipe(s) is absolutely **necessary** for the production. All MAGWRC couplings from this table are **always** custom-made and can **not** be refunded!

**Note:** All information is based on the current state of our technical experience at the time of preparation. If necessary, they must be adapted to any changes. We reserve the right to make technical changes. Our general terms and conditions of sale and delivery apply.