


Product Data Sheet

Compact Seal Hybrid CSH



Reliable connections -
worldwide!

Product description:

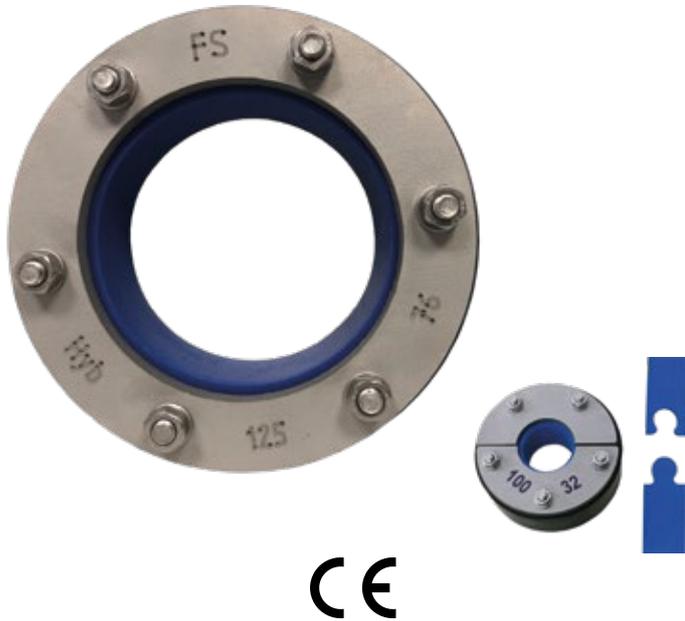

Product Name	Compact Seal Hybrid CSH
Product Group	Pipe lead-trough
Product Code	CSH
Sizes	OD 35 – 350
Rubber	EPDM, PUR
Steel Quality	1.4301 / AISI 304 / V2A or 1.4404 / AISI 316 / V4A
Plastic Type	–
Pressure Rating	3 bar / 43.5 PSI or 5 bar / 72.5 PSI
Vacuum	–
Standards	Sound insulation according to DIN 4109
Shore Resistance	EPDM: 55 / PUR: 25
Temperature Range	-40 to 120 °C
Radon proof	✓
UV Resistance	✓
Oil / petrol Resistance	EPDM: ✗, PUR: ✓
Fire Performance	Class F
Soil Suitability	✓
Flush-mounted Suitability	✓
Tensile Strength	✗

Also available with KTW (drinking water) approval.

Note: All information is based on the current state of our technical experience at the time of preparation. If necessary, they must be adapted to any changes. We reserve the right to make technical changes. Our general terms and conditions of sale and delivery apply.

Compact Seals HYBRID, 3 bar

Product Code	Core Drill (mm)	max. OD Media Pipe (mm)	Net Weight (kg)
CSH80-3	80	45	0.6
CSH100-3	100	66	1.0
CSH125-3	125	87	1.5
CSH150-3	150	112	2.1
CSH200-3	200	162	2.8
CSH250-3	250	212	4.5
CSH300-3	300	260	6.0
CSH350-3	350	300	7.0
CSH400-3	400	350	7.5
Surcharge for eccentricity			15 %
Surcharge for split version			15 %

Compact Seals HYBRID, 5 bar

Product Code	Core Drill (mm)	max. OD Media Pipe (mm)	Net Weight (kg)
CSH80-5	80	45	0.9
CSH100-5	100	66	1.3
CSH125-5	125	87	2.0
CSH150-5	150	112	2.8
CSH200-5	200	162	3.7
CSH250-5	250	212	4.8
CSH300-5	300	260	8.3
CSH350-5	350	300	10.0
CSH400-5	400	350	12.0
Surcharge for eccentricity			15 %
Surcharge for split version			15 %

Note: All information is based on the current state of our technical experience at the time of preparation. If necessary, they must be adapted to any changes. We reserve the right to make technical changes. Our general terms and conditions of sale and delivery apply.