


Product Data Sheet

Compact Seal Senso CSPU



Reliable connections -
worldwide!

Product description:

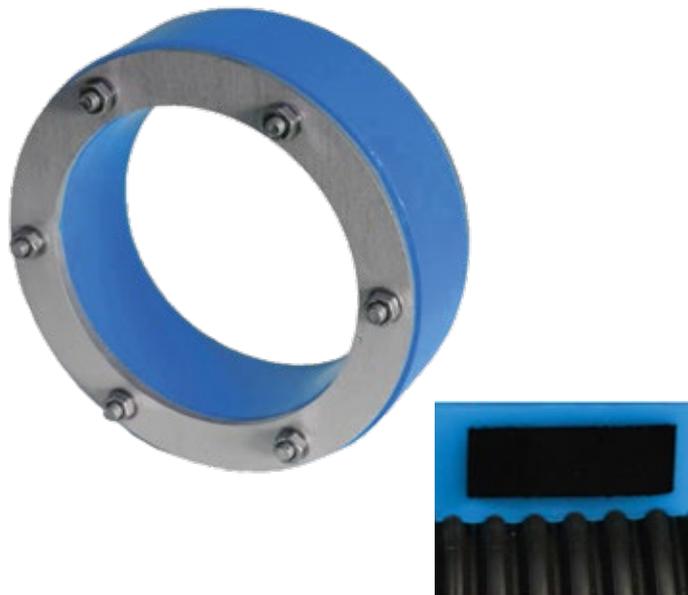

Product Name	Compact Seal Senso CSPU
Product Group	Pipe lead-trough
Product Code	CSPU
Sizes	OD 63 – 200
Rubber	EPDM, PUR
Steel Quality	1.4301 / AISI 304 / V2A or 1.4404 / AISI 316 / V4A
Pressure Rating	1.5 bar / 21.8 PSI
Vacuum	–
Standards	Sound insulation according to DIN 4109
Shore Resistance	EPDM: 55 / PUR: 25
Temperature Range	-40 to 120 °C
Radon proof	✓
UV Resistance	✓
Oil / petrol Resistance	EPDM: ✗, PUR: ✓
Fire Performance	Class F
Soil Suitability	✓
Flush-mounted Suitability	✓
Tensile Strength	✗

Also available with KTW (drinking water) approval.

Product Code	Core Drill (mm)	Media Pipe (mm)	Net Weight (kg)
CS100-40_PU	100	40	1.0
CS100-50_PU	100	50	1.0
CS100-63_PU	100	63	1.0
CS125-75_PU	125	75	1.5
CS125-90_PU	125	90	1.5
CS150-110_PU	150	110	2.1
CS200-125_PU	200	125	3.0
CS200-140_PU	200	140	3.0
CS200-160_PU	200	160	3.0
CS250-175_PU	250	175	4.5
CS300-200_PU	300	200	6.0

Note: All information is based on the current state of our technical experience at the time of preparation. If necessary, they must be adapted to any changes. We reserve the right to make technical changes. Our general terms and conditions of sale and delivery apply.