


Product Data Sheet

Compact Seal CSU



Reliable connections -
worldwide!

Product description:

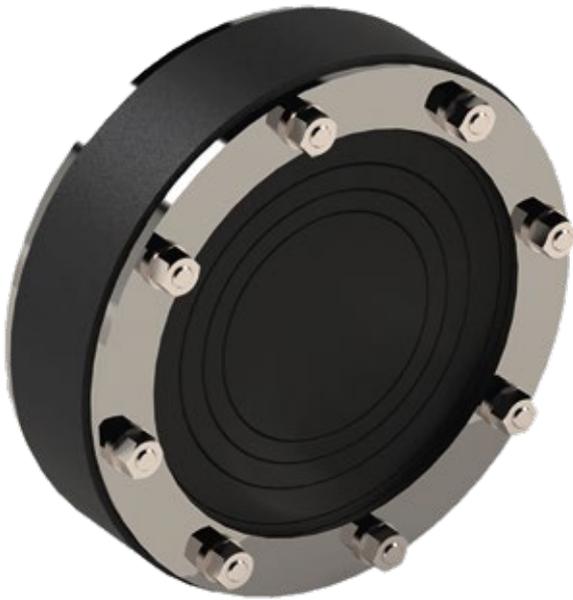

Product Name	Compact Seal CSU
Product Group	Pipe lead-trough
Product Code	CSU
Sizes	OD 63 – 200
Rubber	EPDM
Steel Quality	1.4301 / AISI 304 / V2A or 1.4404 / AISI 316 / V4A
Pressure Rating	1.5 bar / 21.8 PSI
Vacuum	–
Standards	–
Shore Resistance	55
Temperature Range	-40 to 120 °C constant, 160 °C intermittent
Radon proof	✓
UV Resistance	✓
Oil / petrol Resistance	✗
Fire Performance	Class F
Soil Suitability	✓
Flush-mounted Suitability	✓
Tensile Strength	✗

Note: All information is based on the current state of our technical experience at the time of preparation. If necessary, they must be adapted to any changes. We reserve the right to make technical changes. Our general terms and conditions of sale and delivery apply.

Product Code	Incisions for occupancy (mm)	Net Weight (kg)	Width Rubber single-layered (mm)
Compact Seal CSU – EPDM insert with 1 hole for cable / pipe			
CSU-100	20 / 25 / 30 / 35 / 40 / 45 / 50 / 55 / 60 / 64	1.0	40
CSUS-100	20 / 25 / 30 / 35 / 40 / 45 / 50 / 55 / 60 / 64	1.0	40
CSU-125	63 / 76 / 90	1.0	30
CSU-150	63 / 76 / 90 / 110	1.3	30
CSU-200	110 / 125 / 140 / 160	1.9	30
Compact Seal CSM – Multiple feedthrough – EPDM inserts 5 – 32 mm with flare, elastomer 30 mm			
CSM100-3H	3× 5 / 10 / 15 / 20 / 25 / 32	1.0	30
CSMS100-3H	3× 5 / 10 / 15 / 20 / 25 / 32	1.0	30
CSM100-4H	4× 5 / 10 / 15 / 20 / 25 / 32	1.0	30
CSMS100-4H	4× 5 / 10 / 15 / 20 / 25 / 32	1.0	30
CSMS125-5H	5× 5 / 10 / 15 / 20 / 25 / 32	1.0	30
CSMS150-4H	4× 5 / 10 / 15 / 20 / 25 / 32	1.3	30
CSMS150-8H	8× 5 / 10 / 15 / 20 / 25 / 32	1.3	30
CSMS200-12H	12× 5 / 10 / 15 / 20 / 25 / 32	1.9	30
Compact Seal CSM – Multiple feedthrough – EPDM inserts 20 – 64 mm, elastomer 40 mm			
CSM250-2H	2× 21 / 27 / 34 / 43 / 50 / 63	6.0	40
CSMS250-2H	2× 21 / 27 / 34 / 43 / 50 / 63	6.0	40
CSM250-3H	3× 21 / 27 / 34 / 43 / 50 / 63	6.0	40
CSMS250-3H	3× 21 / 27 / 34 / 43 / 50 / 63	6.0	40
CSM300-4H	4× 21 / 27 / 34 / 43 / 50 / 63	8.0	40
CSMS300-4H	4× 21 / 27 / 34 / 43 / 50 / 63	8.0	40

Note: All information is based on the current state of our technical experience at the time of preparation. If necessary, they must be adapted to any changes. We reserve the right to make technical changes. Our general terms and conditions of sale and delivery apply.